



The World's first self-pressurizing showerhead line that adapts to low and variable water pressure has just got 3X better! Designed to save water compared to traditional shower fixtures, the Oxygenics TriSpa shower ensures a superior and refreshing shower experience while providing 3 unique spray patterns for the ultimate shower experience.

Oxygenics showerheads are the only high-caliber fixtures on the market with the complete package - a powerful self-pressurizing sensational shower spray, a reduced water and energy bill, and a durable, high-quality build. The core components of Oxygenics TriSpa showerheads are made of Delrin®, an acetal resin similar to Teflon®. The two other spray nozzles are made from Delrin and anti-scale rubber providing the required strength, toughness, and resistance to corrosion and scale buildup that is necessary to ensure long lasting performance.

TECHNOLOGY

The Oxygenics TriSpa Series meets ANSI standard testing and materials specifications A112.18.1M-1996.

Designed to function appropriately at pressures no less than 20 psi. Constructed to withstand pressures of 150 psi and temperatures up to 160° F.

The internal components are constructed of injection molded Delrin acetal. The pieces are machine pressed into the base and cannot be removed with a straight pushing or pulling force of less than 100 lbs.

The center core is constructed of Delrin acetal resin. The core spray uses a venturi system consisting of 16 air entrance ports, which allow air to increase the spray velocity. Oxygen levels in the water are increased as well. Anti scale rubber is used for the Stream Focus™ spray of the TriSpa. To maintain optimal performance, simply rub the rubber spray tips with a finger to eliminate any buildup.

The showerhead face and outer shell of the showerhead is made of plated ABS plastic enhancing the showerhead's appearance and muffling the spray functions.

Utilizes a ball and socket base allowing for adjustment. Ball is constructed with Delrin acetal. The seating washer is designed to seal around the ball swivel when compressed by assembly. The base connector is made from free machining brass and CBA alloy. The base fits any standard 1/2" male threaded shower arm.

Lifetime warranted against clogging and defective material and workmanship. Packed in individual cartons with warranty, installation instructions and Teflon tape.

Model	Finish	Flow Rate
80210	Chrome	1.9
80220	Chrome	2.5
82210	Brushed Nickel	1.9
82220	Brushed Nickel	2.5
83210	Gold	1.9
83220	Gold	2.5
84210	Oil Rub/Bronze	1.9
84220	Oil Rub/Bronze	2.5

FEATURES

- Patented technology
- 3 unique spray settings
 - Oxygenics, Stream Focus, and Hydro Flood
- Eliminates clogging
- Extremely durable
- Resists corrosion
- Self-pressurizing
- Lifetime guaranteed
- Saves up to 70% water
- Custom branding
- Multiple finishes

BOX SPECIFICATIONS

Product dimensions:
4.5" x 4.5" x 5.75"

Package dimensions:
4.75" x 4.75" x 6"

Individual product weight:
1 lbs.

Case quantity:
24 units
- 2 Cartons (12 per)

Carton dimensions:
13.25" x 15" x 10"

Carton weight:
12 lbs.

CLAMSHELL SPECIFICATIONS


Product dimensions:
4.5" x 4.5" x 5.75"

Package dimensions:
7.75" x 7.375" x 4.5"

Individual product weight:
1 lbs.

Case quantity:
4 units

Case weight:
4 lbs.

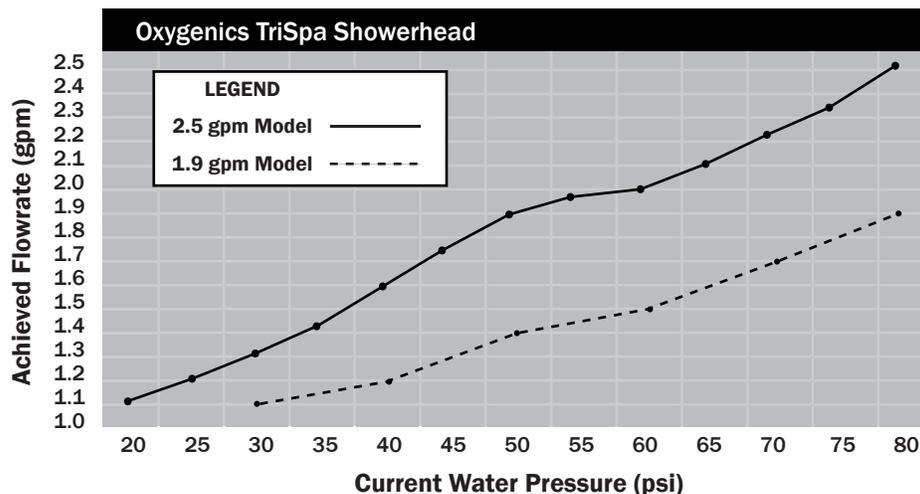



The World's first self-pressurizing showerhead line that adapts to low and variable water pressure has just got 3X better! Designed to save water compared to traditional shower fixtures, the Oxygenics TriSpa shower ensures a superior and refreshing shower experience while providing 3 unique spray patterns for the ultimate shower experience.

Oxygenics showerheads are the only high-caliber fixtures on the market with the complete package - a powerful self-pressurizing sensational shower spray, a reduced water and energy bill, and a durable, high-quality build. The core components of Oxygenics TriSpa showerheads are made of Delrin®, an acetal resin similar to Teflon®. The two other spray nozzles are made from Delrin and anti-scale rubber providing the required strength, toughness, and resistance to corrosion and scale buildup that is necessary to ensure long lasting performance.

TECHNOLOGY

The Oxygenics TriSpa Series meets ANSI standard testing and materials specifications A112.18.1M-1996.

Designed to function appropriately at pressures no less than 20 psi. Constructed to withstand pressures of 150 psi and temperatures up to 160° F.

The internal components are constructed of injection molded Delrin acetal. The pieces are machine pressed into the base and cannot be removed with a straight pushing or pulling force of less than 100 lbs.

The center core is constructed of Delrin acetal resin. The core spray uses a venturi system consisting of 16 air entrance ports, which allow air to increase the spray velocity. Oxygen levels in the water are increased as well. Anti scale rubber is used for the Stream Focus™ spray of the TriSpa. To maintain optimal performance, simply rub the rubber spray tips with a finger to eliminate any buildup.

The showerhead face and outer shell of the showerhead is made of plated ABS plastic enhancing the showerhead's appearance and muffling the spray functions.

The wand holder utilizes a ball and socket base allowing for adjustment. Ball is constructed with Delrin acetal. The seating washer is designed to seal around the ball swivel when compressed by assembly. The base connector is made from free machining brass and CBA alloy. The base fits any standard 1/2" male threaded shower arm.

The Oxygenics TriSpa 60" hose and holder are constructed of ABS plastic, brass, and zinc. Both are designed to withstand pressures of up to 100 psi.

Lifetime warranted against clogging and defective material and workmanship. Packed in individual cartons with warranty, installation instructions and Teflon tape.

Model	Finish	Flow Rate
80227	Chrome	2.5
82227	Brushed Nickel	2.5
84227	Oil Rub/Bronze	2.5

FEATURES

- Patented technology
- 3 unique spray settings
 - Oxygenics, Stream Focus, and Hydro Flood
- Eliminates clogging
- Extremely durable
- Resists corrosion
- Self-pressurizing
- Lifetime guaranteed
- Saves up to 70% water
- Custom branding
- Multiple finishes

SPECIFICATIONS

Product dimensions:
4.5" x 4.5" x 10.25"

Package dimensions:
5" x 5" x 10.5"

Individual product weight:
2 lbs.

Case quantity:
24 units
- 2 Cartons (12 per)

Carton dimensions:
21" x 15" x 10"

Carton weight:
24 lbs.

CLAMSHELL SPECIFICATIONS

Product dimensions:
4.5" x 4.5" x 10.25"

Package dimensions:
12.5" x 7" x 4.75"

Individual product weight:
2 lbs.

Case quantity:
4 units

Case weight:
8 lbs.

